

**THIS TECHNICAL DOCUMENT BROUGHT
TO YOU AT NO COST FROM:**

ARCADEDOCS.COM

**THE INTERNET'S LARGEST REFERENCE LIBRARY
SUPPORTING THE COIN-OPERATED
COLLECTOR AND OPERATOR COMMUNITIES**

Dedicated With Special Thanks To:

The Many Amusement Machine Manufacturers,
Collectors, Dealers, Designers, Distributors,
Engineers, Operators, and Players
That Have Generously Continued To Support Us
Throughout The Years


**MANUALS — SCHEMATICS — TECHNICAL BULLETINS
DIP SWITCH SETTINGS — PIN-OUTS — TRAINING**

Supplement to

The Adventures of

MAJOR HAVOC™

Conversion Instructions for Tempest™ (TM-267, 1st Printing)

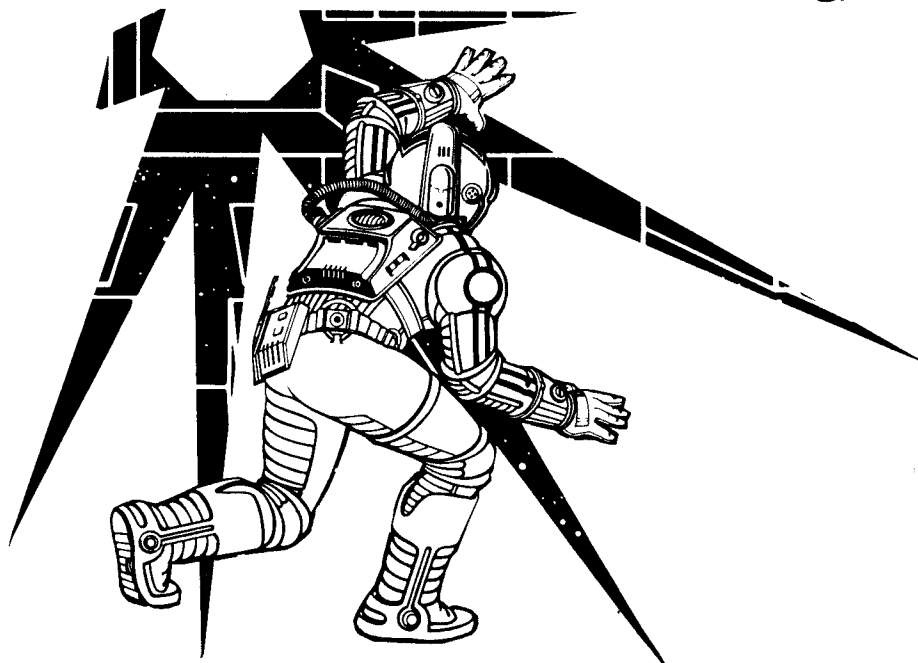


This Supplement contains changes to the Major Havoc Conversion Instructions for Tempest. Please make the changes described in this Supplement directly to your instruction manual.

The following changes affect Figure 17–Deflection PCB Schematic (Version 4).

- Page 43.** Delete the two 1N4002 diodes from transistors Q102 and Q103.
- Page 43.** Add two 1N4002 diodes between the emitter and collector of transistors Q705 and Q706 as follows:

From:



To:

